

# Pool & Recreational Shotcrete Corner

**O**n behalf of the Pool & Recreational Shotcrete Committee, I am proud to announce the establishment of our second position statement, “Definitions of Key Shotcrete Terminology.” Getting back to basics in the shotcrete arena starts with understanding all of its components. This position statement identifies key terminology in the spray process and provides their formal definitions. As a pool contractor, having an understanding of and being able to identify the components of the process is half the battle in successful application.

As stated in Position Statement #1, “Compressive (Strength) Values of Pool Shotcrete,” this information is to be used continually as a builder’s reference. These statements are voted

on and approved by ASA for the betterment of pool builders specifically, although these guidelines are relevant to other industries that use shotcrete applications. ASA is currently working on three new position statements highlighting water tightness, sustainability, and mixture designs. Our goal as the ASA Pool & Recreational Shotcrete Committee is to help pool builders who work with shotcrete identify proper applications and methodology. This can also be found on the ASA Web site at [www.shotcrete.org/poolpositionpaper\\_2](http://www.shotcrete.org/poolpositionpaper_2). Add this position statement to your library!

*William T. Drakeley*

Chair, Pool & Recreational Shotcrete Committee

**AMERICAN  
SHOTCRETE  
ASSOCIATION**

38800 Country Club Dr. • Farmington Hills, MI 48331

Phone: (248) 848-3780 • Fax: (248) 848-3740

E-mail: [info@shotcrete.org](mailto:info@shotcrete.org) • Web site: [www.shotcrete.org](http://www.shotcrete.org)

## Shotcrete Use in Pool & Recreational Projects—ASA Compilation #5




This 29-page black and white soft-cover book, “Shotcrete Use in Pool & Recreational Projects—ASA Compilation #5,” is a compilation of nine previously published papers in ASA’s *Shotcrete* magazine.

Copies of the compilation are available for a special ASA Member price of \$9.00 U.S. (Nonmember \$14.00).  
Order Code: PRPUS

Pricing includes shipping. Call (248) 848-3780 to place an order.

# Pool & Recreational Shotcrete Corner

## American Shotcrete Association's Pool & Recreational Shotcrete Committee Position Statement #2

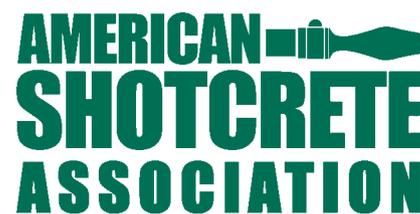

# Definitions of Key Shotcrete Terminology

Shotcrete specifications—from mixture design through application—hold pool contractors responsible for shotcrete performance. Engineering plans, architectural renderings, or referenced concrete standards applied to pool construction use a variety of shotcrete terminology—both correctly and incorrectly. Understanding the meaning of the terminology is paramount to understanding the entire process as it relates to the pool construction industry. These key shotcrete terminology definitions are a starting point for any contractor building concrete swimming pools using the shotcrete process.

Shotcrete as a technology is not industry-specific. ASA and its Pool & Recreational Shotcrete Committee, however, are currently narrowing the focus on some key phrases or definitions that are used consistently in their practice area. These are steps to increase the cohesiveness and the uniformity of the shotcrete industry. Having contractors understand and use the same terminology for both the dry- and wet-mix processes immediately improves communication and understanding of all involved in the shooting applications. This understanding is the first step toward the universal acceptance of the shotcrete process by the entire pool industry.

### TERMS

### DEFINITIONS

<b>Shotcrete</b>	A concrete-placing process where concrete mixtures are conveyed through a hose and then pneumatically projected at a high velocity onto a surface to achieve high-quality, in-place compaction. It produces high-quality dense concrete with a low water-cementitious material ratio ( <i>w/cm</i> ), low permeability, and a high cementitious material content.
<b>ACI</b>	The American Concrete Institute (ACI) develops and publishes consensus documents (codes, specifications, and guides) for the shotcrete process through ACI Committee 506, Shotcreting. ACI also maintains the ACI Shotcrete Nozzleman Certification program under the guidance of ACI Committee C660.
<b>ASA</b>	ASA is a nonprofit organization of contractors, suppliers, manufacturers, designers, and engineers that encourages and promotes the safe and beneficial use of the shotcrete process. ASA is the primary sponsoring group for administering the ACI Shotcrete Nozzleman Certification program.
<b>Admixture</b>	Any material deliberately added to concrete before or during mixing, other than cementitious material, water, aggregates, and fiber reinforcement.*
<b>Blowpipe</b>	Air jet operated by a nozzleman's helper in shotcrete shooting to assist in keeping rebound or other loose material out of the work. Also known as an air lance.†
<b>Brooming</b>	A finishing procedure in which a broom is pulled across the shotcrete surface to roughen the surface.†
<b>Cementitious paste</b>	Mixture of cementitious material and water that is part of concrete.*
<b>Compressive strength</b>	Measured maximum resistance of a concrete or mortar specimen to axial compressive loading, expressed as a force per unit cross-sectional area (for example, lb/in. <sup>2</sup> ).*
<b>Concrete</b>	A mixture of two components: aggregate and paste. The paste is made of cementitious materials and water and acts as the glue that binds the aggregates (sand and/or ground or crushed stone) into a hardened mass due to the chemical reaction of the cement and water (hydration).**
<b>Consistency</b>	The relative mobility or ability of freshly mixed concrete or mortar to flow.*
<b>Cracking</b>	It occurs when the rate of evaporation exceeds the rate of bleeding.*

# Pool & Recreational Shotcrete Corner

<b>Curing</b>	Action taken to maintain moisture and temperature conditions in a freshly placed mixture to allow cementitious material hydration to occur so that the potential properties of the mixture may develop.
<b>Cuttings</b>	Shotcrete material that has been applied beyond the finish face and is cut off in the trimming or rodding process.†
<b>Delivery equipment</b>	Equipment that introduces and conveys shotcrete material into the delivery hose.
<b>Delivery hose</b>	Hose through which shotcrete materials pass on their way to the nozzle; also known as the material hose or conveying hose.†
<b>Dry-mix shotcrete</b>	Shotcrete in which most of the mixing water is added at the nozzle.†
<b>Earth surface</b>	When used as forms, must be firm, stable, and trimmed to the desired lines of the finished concrete.
<b>Entrained air</b>	Microscopic air bubbles intentionally incorporated in mortar or concrete during mixing, usually by use of a surface-active agent; typically between 0.0004 in. (10 µm) and 0.04 in. (1 mm) in diameter and spherical, or nearly so.†
<b>Finish</b>	The texture of a surface after consolidating and finishing operations have been performed.‡
<b>Finisher</b>	Craftsman who trims and finishes the surface of the shotcrete (also refer to Rodman).†
<b>Fly ash</b>	The finely divided pozzolanic residue resulting from the combustion of ground or powdered coal, which is transported from the firebox through the boiler by flue gases.*
<b>Forms</b>	A system for the in-place support of fresh shotcrete, which is rigid enough to resist the impact force of shotcrete while maintaining the intended shape and preventing excessive vibration.
<b>Ground wire</b>	Small-gauge, high-strength steel wire used to establish line and grade for shotcrete work; also called alignment wire, screed wire, or shooting wire.†
<b>Gun</b>	Dry-mix shotcrete delivery equipment.†
<b>Gun finish</b>	Undisturbed final layer of shotcrete as applied from a nozzle without hand finishing. Sometimes referred to as a natural finish.†
<b>Gun operator</b>	Craftsman on dry-mix shotcreting crew who operates delivery equipment. Sometimes referred to as “gunman.”†
<b>Gunitite</b>	Trade name originally used for dry-mix shotcrete.†
<b>Hose tender</b>	Crew member responsible for moving and/or adjusting delivery hose to aid nozzleman; also responsible for delivery hose connections.
<b>Hydration</b>	The chemical reaction between hydraulic cementitious material and water.*
<b>Impact velocity</b>	The velocity of the material particles at impact on the receiving surface.† (Ideal at 350 to 400 ft/s [106 to 122 m/s].)
<b>Mortar</b>	A mixture of cementitious paste, fine aggregate, water, and admixtures. In fresh concrete, this is the material that occupies the spaces between the particles of coarse aggregate.*
<b>Nozzle</b>	Attachment at end of delivery hose where shotcrete is projected at high velocity.†
<b>Nozzleman</b>	Craftsman on a shotcrete crew who manipulates the shotcrete nozzle, controls material consistency (dry process), and controls the final placement of the material.
<b>Overspray</b>	Shotcrete material deposited away from intended receiving surface.†
<b>Plastic shrinkage</b>	Cracking that occurs in the surface of fresh concrete soon after it is placed and before initial set.
<b>Pneumatic feed</b>	Shotcrete delivery equipment in which a pressurized air stream conveys material.†

# Pool & Recreational Shotcrete Corner

<b>Positive displacement</b>	Wet-mix shotcrete delivery equipment in which a pump or other non-pneumatic means pumps the material through the delivery hose in a solid mass. <sup>†</sup>
<b>Porosity</b>	The ratio of the volume of voids in a material to the total volume of the material.
<b>Permeability</b>	The rate of flow of water through a cross-sectional area of a porous medium under a given hydraulic gradient and temperature condition.
<b>Pozzolan</b>	A siliceous or siliceous and aluminous material, which in itself possesses little or no cementitious value but will, in finely divided form and in the presence of moisture, chemically react with calcium hydroxide at ordinary temperatures to form compounds possessing cementitious properties.*
<b>Predampening</b>	In the dry-mix process, adding water to the aggregate before mixing to bring its moisture content to a specified amount, usually 3 to 6%. <sup>†</sup>
<b>Pump</b>	Wet-mix delivery equipment. <sup>†</sup>
<b>Pump operator</b>	Craftsman on wet-mix shotcreting crew who operates the shotcrete pump. <sup>†</sup>
<b>Rebound</b>	Shotcrete material that bounces away from the surface against which the shotcrete is being projected. <sup>†</sup> Rebound has inadequate cementitious content as compared to the original shotcrete.
<b>Rod</b>	Sharp-edged cutting screed used to trim shotcrete to forms or ground wires. <sup>†</sup>
<b>Rodman</b>	Craftsman on the shotcrete crew who uses a rod or other tools to trim and finish the shotcrete. <sup>†</sup>
<b>Rolling</b>	The result of applying shotcrete at angles less than 90 degrees to the receiving surface, resulting in an uneven, wavy, textured surface at the outer edge of the spray pattern. <sup>†</sup>
<b>Saturated surface-dry</b>	(SSD) The moisture condition of the substrate so that it does not absorb water from the placed shotcrete.
<b>Sand pocket</b>	A zone in the shotcrete containing fine aggregate with little to no cement <sup>†</sup> (sand lens).
<b>Shadow</b>	The area behind an obstacle that is not adequately impacted and compacted by the shotcrete stream. In hardened shotcrete, shadow refers to any porous area behind an obstacle, such as reinforcement. <sup>†</sup>
<b>Sloughing</b>	Subsidence or sliding of shotcrete, generally due to excessive water in the mixture, also called sagging. <sup>†</sup>
<b>Slump</b>	A measure of the consistency of fresh concrete equal to the subsidence of a molded specimen immediately after removal of the slump cone.*
<b>Substrate</b>	Any material surface onto which shotcrete is applied.
<b>Waterproof</b>	Completely impervious to water in either liquid or vapor state. (Because nothing can be completely “impervious” to water under infinite pressure over infinite time, this term should not be used. <sup>‡</sup> )
<b>Watertight</b>	Impermeable to water except when under hydrostatic pressure sufficient to produce structural failure.
<b>w/cm</b>	The ratio of the total amount of water (including water in high-range water-reducing admixtures [HRWRA]) to the amount of cementitious material (portland cement, fly ash, silica fume, slag, or other supplemental cementitious materials) in a concrete mixture, stated on the basis of weight or mass; frequently abbreviated <i>w/cm</i> .*
<b>Wet-mix shotcrete</b>	Shotcrete where the concrete, including water, is completely mixed prior to introduction into the delivery hose; compressed air is introduced to the material flow at the nozzle.

## References

\*ACI Certification Craftsman Workbook (CP-60 09), American Concrete Institute, Farmington Hills, MI, 2009.

<sup>†</sup>ACI Committee 506, “Guide to Shotcrete (ACI 506R-05),” American Concrete Institute, Farmington Hills, MI, 2005, 40 pp.

<sup>‡</sup>“ACI Terminology,” American Concrete Institute, Farmington Hills, MI, 2010, [http://www.concrete.org/Technical/CCT/ACI\\_Concrete\\_Terminology.pdf](http://www.concrete.org/Technical/CCT/ACI_Concrete_Terminology.pdf). (last accessed May 23, 2012)